

EXTERIOR WALL RECESSED

This collection of led wall recessed luminaires are ideal for directional lighting or a subtle accent. They provide safety, add atmosphere and guarantee additional style to your project.

www.deltalight.com/EWR



To discover more, or download technical files of your preferred product, just add the product reference (without colour) or name to the deltalight.com url.
E.g. www.deltalight.com/2020424 or www.deltalight.com/heli-x-screen






INDEX

EXTERIOR WALL RECESSED



LOGIC MINI R
EXT 44



LEDSC S
EXT 51



LOGIC MINI S
EXT 44



HELIX SCREEN
EXT 53



LOGIC W L
EXT 45



LOGIC W S
EXT 45



LEDSC GO IN FORTE
EXT 49



LEDSC R
EXT 51

HELIX SCREEN LED	EXT 53
LEDSC®	EXT 51
LEDSC GO IN FORTE	EXT 49
LOGIC MINI W R	EXT 44
LOGIC MINI W S	EXT 44
LOGIC W L	EXT 45
LOGIC W S	EXT 45


FULL INFO / PAG TEC

Requirements

INSTALLATION


CONCRETE BOX 191
270 11 191

315 x 80




CONCRETE BOX 192
270 11 192

135 x 125




CONCRETE PACK LOGIC W L
304 32 96

315 x 80



CONCRETE PACK LOGIC W S
304 33 96

135 x 125



FULL INFO / PAG TEC

Options

INSTALLATION

CONCRETE BOX 188
270 11 188

Ø60 x 65

Ø67 x 70



CONTROL GEAR

LED POWER SUPPLY
24V-DC / 20W
300 89 24 20


146 x 55 x 19



new




Logic Mini W R



new



Logic Mini W S



Ø 55 x 50

LOGIC MINI W R ◇

304 30 12 ◇

◇ = A / W

INCL. 1 x POWERLED WHITE 0,6W / 3000K ●
EXCL. LED POWER SUPPLY 24V-DC

CE 0,2 IP54

OPTIONS

CONCRETE BOX 188

LED POWER SUPPLY 24V-DC

Ø 55 x 50

LOGIC MINI W S ◇

304 31 12 ◇

◇ = A / W

INCL. 1 x POWERLED WHITE 0,6W / 3000K ●
EXCL. LED POWER SUPPLY 24V-DC

CE 0,2 IP54

OPTIONS

CONCRETE BOX 188

LED POWER SUPPLY 24V-DC

CRI>80 40lm




CRI>80 40lm



Logic W L



Logic W S

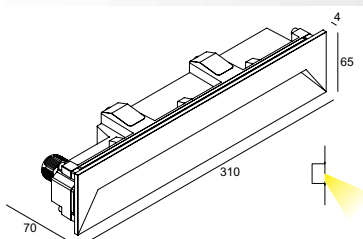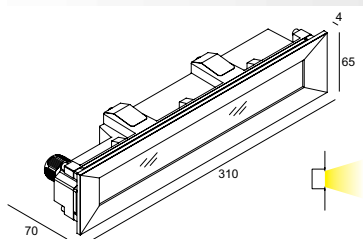

IP65

BOX 110-135

LOGIC W L F

304 32 02 83

◇ = A / N / W

INCL. 1 x GLASS SBL

INCL. 1 x LED CLUSTER 9,5W / 3000K

INCL. LED POWER SUPPLY 350mA-DC

INCL. 1 x PG11

110-240V / 50-60Hz

CE 1.0 IP65

REQUIREMENTS
CONCRETE BOX 191

or
CONCRETE PACK LOGIC W L

IP65

BOX 110-135

LOGIC W L

304 32 01 83

◇ = A / N / W

INCL. 1 x GLASS SBL

INCL. 1 x LED CLUSTER 9,5W / 3000K

INCL. LED POWER SUPPLY 350mA-DC

INCL. 1 x PG11

110-240V / 50-60Hz

CE 1.0 IP65

REQUIREMENTS
CONCRETE BOX 191

or
CONCRETE PACK LOGIC W L

IP65

BOX 115-140

LOGIC W S

304 33 01 83

◇ = A / N / W

INCL. 1 x PC SBL

INCL. 1 x LED CLUSTER 6,2W / 3000K

INCL. LED POWER SUPPLY 350mA-DC

INCL. 1 x PG11

110-240V / 50-60Hz

CE 1.0 IP65

REQUIREMENTS
CONCRETE BOX 192

or
CONCRETE PACK LOGIC W S

CRI>80 1270lm

CRI>80 703lm











FULL INFO / PAG TEC

Options

INSTALLATION



CONCRETE BOX 151 42 x 42 x 58 43 x 43
302 19 21


CONCRETE BOX TR 152 42 x 42 x 58 43 x 43
302 19 22

CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



Leds Go In Forte



IP67

38 x 38 x 45

LEDS GO IN FORTE NW ◇

302 10 34 ◇

◇ = ANO

INCL. 1 x POWERLED WHITE [A] 1,1W / 4000K ●

LEDS GO IN FORTE WW ◇

302 10 32 ◇

◇ = ANO

INCL. 1 x POWERLED WHITE [A] 1,1W / 3000K ●

EXCL. LED POWER SUPPLY 350mA-DC

CE 0,1 IP67

OPTIONS

CONCRETE BOX 151

CONCRETE BOX TR 152

LED POWER SUPPLY 350mA-DC / DIM



ISAGEN / AIA

FULL INFO / PAG TEC

Options

INSTALLATION



CONCRETE BOX 151 302 19 21	42 x 42 x 58	43 x 43
CONCRETE BOX TR 152 302 19 22	42 x 42 x 58	43 x 43
CONCRETE BOX 153 302 20 21	43 x 43 x 60	43 x 43
CONCRETE BOX TR 154 302 20 22	43 x 43 x 60	43 x 43




CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER





Leds C®



IP67

41 x 38

LEDS C® R ST NW ◇

302 20 34 ◇

◇ = ANO

INCL.1 x POWERLED WHITE [A] 1,1W / 4000K ●


LEDS C® R ST WW ◇

302 20 32 ◇

◇ = ANO

INCL.1 x POWERLED WHITE [A] 1,1W / 3000K ●

EXCL.LED POWER SUPPLY 350mA-DC



OPTIONS

LED POWER SUPPLY 350mA-DC / DIM

41 x 38

LEDS C® R NW ◇

302 20 10 ◇

◇ = ANO

INCL.1 x POWERLED WHITE [A] 1,1W / 4000K ●

LEDS C® R WW ◇

302 20 12 ◇

◇ = ANO

INCL.1 x POWERLED WHITE [A] 1,1W / 3000K ●


LEDS C® R BLUE ◇

302 20 11 BL ◇

◇ = ANO

INCL.1 x POWERLED BLUE [A] 1,1W ●

EXCL.LED POWER SUPPLY - 350mA-DC



OPTIONS

CONCRETE BOX 153

CONCRETE BOX TR 154

LED POWER SUPPLY - 350mA-DC / DIM

38 x 38 x 38

LEDS C® S NW ◇

302 20 44 ◇

◇ = ANO

INCL.1 x POWERLED WHITE [A] 1,1W / 4000K ●

LEDS C® S WW ◇

302 20 42 ◇

◇ = ANO

INCL.1 x POWERLED WHITE [A] 1,1W / 3000K ●


LEDS C® S BLUE ◇

302 20 41 BL ◇

◇ = ANO

INCL.1 x POWERLED BLUE [A] 1,1W ●

EXCL.LED POWER SUPPLY - 350mA-DC



OPTIONS

CONCRETE BOX 151

CONCRETE BOX TR 152

LED POWER SUPPLY - 350mA-DC / DIM





FULL INFO / PAG TEC

Options

INSTALLATION

CONCRETE BOX 187
270 11 187

80 x 95 x 70

85 x 100





CONTROL GEAR

LED POWER SUPPLY
ALL INFO ON FOLD-OUT COVER



Heli X Screen LED

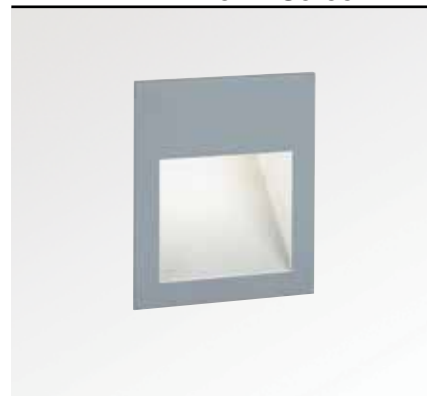

75 x 87 x 60

HELI X SCREEN LED NW ◇

202 04 24 ◇

◇ = A / N

INCL. 1 x POWERLED WHITE [A] 1,1W / 4000K ●
EXCL. LED POWER SUPPLY 350mA-DC

HELI X SCREEN LED WW ◇

202 04 22 ◇

◇ = A / N

INCL. 1 x POWERLED WHITE [A] 1,1W / 3000K ●
EXCL. LED POWER SUPPLY 350mA-DC

◇ CE 0.3 IP54

OPTIONS

CONCRETE BOX 187

LED POWER SUPPLY 350mA-DC / DIM

